

# TAPR Rod end GIHN-K-90LO-DURBAL - GIHN-K-90LO-DURBAL


<https://www.123bearing.com/bearing-housing/rod-end/tapr/gihn-k-90lo-durbal>

## GIHN-K-90LO



**Description:** Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE. LO pressed into rod end housing. Sliding combination steel / steel with grease nipple.

\* without grease nipple

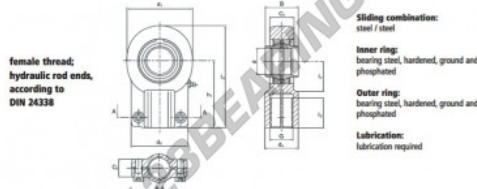

female thread;  
hydraulic rod ends,  
according to  
DIN 24338

Sliding combination:  
steel / steel

Inner ring:  
bearing steel, hardened, ground and  
phosphated

Outer ring:  
bearing steel, hardened, ground and  
phosphated

Lubrication:  
lubrication required

order number	d	d <sub>1</sub>	measurement [mm]	G	d <sub>2</sub>	B	C <sub>1</sub>	C <sub>2</sub>
GIHN-K 90 LO	90	185	M 72 x 3	100,0	160	90	72	52

type	l <sub>1</sub> min	measurement [mm]	l <sub>2</sub>	l <sub>3</sub>	load rating C <sub>0</sub> [kN]	weight [kg]
GIHN-K / GIHN-KL 90 LO	91	195	296,0	85	750,0	17,00

## PRODUCT FEATURES

Brand	DURBAL
N° Ean13	3663952500447
Inside diameter	90 mm
Outside diameter	185 mm
Thickness	72 mm
Type	TAPR
Weight	17000 g
Thread	Right-hand thread
Lubrication	with
Packaging	1

[contact@123bearing.com](mailto:contact@123bearing.com)

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE