


Tapered roller bearing 45340-JTEKT - 45340-JTEKT

<https://www.123bearing.com/bearing-housing/roller-bearing/tapered/45340-jtekt>

Double-row tapered roller bearings
TDI type Koyo

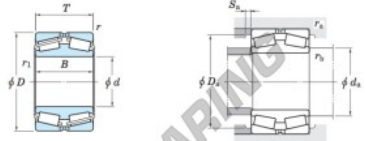

Boundary dimensions (mm)					Basic load ratings (kN)		Limiting speeds (min ⁻¹)		
<i>d</i>	<i>D</i>	<i>B</i>	<i>T</i>	<i>r</i> max.	<i>r</i> min.	<i>C_r</i>	<i>C_{0r}</i>	Grease lub.	Oil lub.
200	340	112	112	3	4	1 080	1 840	770	1 000

Bearing No.	Mounting dimensions (mm)						Con- stant <i>e</i>	Axial load factors			(Refer.) Mass (kg)
	<i>d_a</i> max.	<i>D_a</i> max.	<i>D_a</i> min.	<i>S_a</i> min.	<i>r_a</i> max.	<i>r_b</i> max.		<i>Y₂</i>	<i>Y₃</i>	<i>Y₀</i>	
45340	244	326	300	5	2.5	3	0.35	1.95	2.90	1.91	41.9

PRODUCT FEATURES

Brand	JTEKT
N° Ean13	3663952481920
Inside diameter	200 mm
Inside diameter	7.874" inch
Outside diameter	340 mm
Outside diameter	13.386" inch
Thickness	112 mm
Thickness	4.409" inch
Weight	41900 g
Packaging	1

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE