


## Tapered roller bearing 45368-JTEKT - 45368-JTEKT

<https://www.123bearing.com/bearing-housing/roller-bearing/tapered/45368-jtekt>

Double-row tapered roller bearings — Koyo  
TDI type

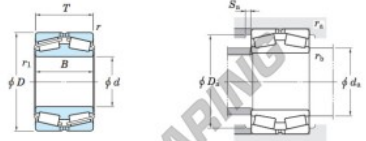

Boundary dimensions (mm)						Basic load ratings (kN)		Limiting speeds (min <sup>-1</sup> )	
<i>d</i>	<i>D</i>	<i>B</i>	<i>T</i>	<i>r</i> max.	<i>r</i> min.	<i>C<sub>r</sub></i>	<i>C<sub>0r</sub></i>	Grease lub.	Oil lub.
340	580	190	190	5	6	3 290	5 470	390	510

Bearing No.	Mounting dimensions (mm)						Con- stant <i>e</i>	Axial load factors			(Refer.) Mass (kg)
	<i>d<sub>a</sub></i> max.	<i>D<sub>a</sub></i> max.	<i>D<sub>a</sub></i> min.	<i>S<sub>a</sub></i> min.	<i>r<sub>a</sub></i> max.	<i>r<sub>b</sub></i> max.		<i>Y<sub>2</sub></i>	<i>Y<sub>3</sub></i>	<i>Y<sub>0</sub></i>	
45368	401	558	515	6	4	5	0.32	2.12	3.15	2.07	202

### PRODUCT FEATURES

Brand	JTEKT
N° Ean13	3663952482071
Inside diameter	340 mm
Outside diameter	580 mm
Thickness	190 mm
Weight	202000 g
Packaging	1

[contact@123bearing.com](mailto:contact@123bearing.com)

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE