


Tapered roller bearing 3383-3329-B-TIMKEN - 3383-3329-B-TIMKEN

<https://www.123bearing.com/bearing-housing/roller-bearing/tapered/3383-3329-b-timken>

TAPERED ROLLER BEARINGS
TYPE TSF

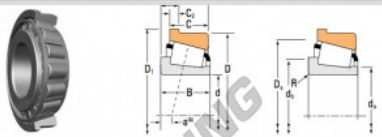

| Bearing Dimensions | | | | Load Ratings | | | | | | Part Number | |
|--------------------|-----------|------------|--|---|-----------------------------|------|---|-----------------------------|--------------------------|-------------|--------|
| Bore d | O.D. D | Width B | | Dynamic ⁽¹⁾ C ₁₀ | Factors ⁽²⁾ e | Y | Dynamic ⁽¹⁾ C ₉₀ | Factors ⁽²⁾ K | Static C ₀ | Inner | Outer |
| mm | mm | mm | | N | | | N | | N | | |
| 41.275 | 81.755 | 30.391 | | 110000 | 0.27 | 2.20 | 20000 | 13000 | 120000 | 3383 | 3329 B |
| 1.6250 | 3.2187 | 1.1963 | | 25000 | | | 6700 | 3100 | 29100 | | |

| Bearing Dimensions | | | | Shaft | | | Housing | | Geometry Factors | | | Bearing Weight |
|--------------------|------------|-------------------------------|--|-----------------------------------|--|--|--|--|------------------|----------------|-----------------|----------------|
| Width B | Width C | Eff. Ctr. a ⁽³⁾ | Outer Ring Range D ₁ D ₂ | Flange Width C ₁ | Max Shaft Fillet Radius R ⁽⁴⁾ | Sealing Shoulder Dia. d ₁ | Sealing Shoulder Dia. d ₂ | Sealing Shoulder Dia. D ₁ | D ₁ | D ₂ | C ₁₀ | kg |
| mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | | lb |
| 30.391 | 23.812 | -18.0 | 86.413 | 4.202 | 3.3 | 61.6 | 54.6 | 77.8 | 34.6 | 12.1 | 0.0144 | 0.76 |
| 1.1965 | 0.9375 | -0.43 | 3.4021 | 0.1675 | 0.14 | 2.42 | 2.15 | 3.05 | | | | 1.68 |

PRODUCT FEATURES

| | |
|------------------|---------------|
| Brand | TIMKEN |
| N° Ean13 | 3663952336893 |
| Inside diameter | 41.275 mm |
| Inside diameter | 1 5/8" inch |
| Outside diameter | 81.755 mm |
| Outside diameter | 3 7/32" inch |
| Thickness | 30.391 mm |
| Thickness | 1.196" inch |
| Packaging | 1 |

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE