


## Self aligning ball bearing 1219-K-M-C3-FAG - 1219-K-M-C3-FAG

<https://www.123bearing.com/bearing-housing/deep-groove-bearing/sefl-aligning/1219-k-m-c3-fag>

**Self-aligning ball bearings 1219-K-M-C3**  
main dimensions to DIN 630, with tapered bore, taper 1:12

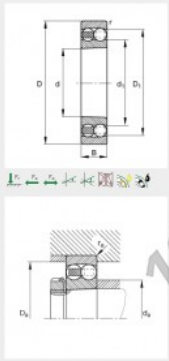

d	95 mm
D	170 mm
B	32 mm
D <sub>1</sub>	148.2 mm
D <sub>2max</sub>	158 mm
d <sub>1</sub>	120.8 mm
d <sub>2min</sub>	107 mm
f <sub>2max</sub>	2.1 mm
f <sub>2min</sub>	2.1 mm
m	3.28 kg Mass
C	64000 N Basic dynamic load rating, radial
e	0.17
Y <sub>1</sub>	3.73
Y <sub>2</sub>	5.78
C <sub>0</sub>	27000 N Basic static load rating, radial
R <sub>0</sub>	3.91
R <sub>1</sub>	6000 1/min Limiting speed
R <sub>2</sub>	6200 1/min Reference speed
C <sub>0p</sub>	1450 N Fatigue limit load, radial

### PRODUCT FEATURES

Brand	FAG
N° Ean13	4064327867414
Inside diameter	95 mm
Outside diameter	170 mm
Thickness	32 mm
Weight	3280 g
Dynamic load	64 kN
Static load	27 kN
Packaging	1
Standard	No standard

[contact@123bearing.com](mailto:contact@123bearing.com)

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE