


Self aligning ball bearing 1214-K-TVH-C3-H214-FAG - 1214-K-TVH-C3-H214-FAG

<https://www.123bearing.com/bearing-housing/deep-groove-bearing/sefl-aligning/1214-k-tvh-c3-h214-fag>

Self-aligning ball bearings 1214-K-TVH-C3 + H214
main dimensions to DIN 630 and DIN 9415, with tapered bore and adapter sleeve

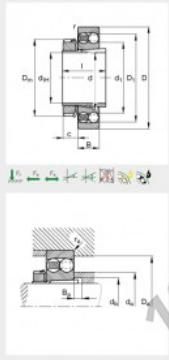

d_{int}	60 mm
D	125 mm
B	24 mm
B_{min}	5 mm
c	14 mm
D ₁	106.6 mm
D _{1max}	116 mm
D ₂	92 mm
d	70 mm
d ₁	87.7 mm
d _{1max}	79 mm
d _{2min}	75 mm
d _{2max}	41 mm
f _{amax}	1.8 mm
H214	Moss, adapter sleeve
m	1.23 kg Moss
m ₁	0.63 kg Moss, adapter sleeve
C	35000 N Basic dynamic load rating, radial
e	0.19
Y ₁	3.36
Y ₂	5.21
C ₀	13700 N Basic static load rating, radial
Y ₀	3.52
n ₀	6000 1/min Limiting speed
n ₀	7900 1/min Reference speed
C ₀	800 N Fatigue limit load, radial

PRODUCT FEATURES

Brand	FAG
N° Ean13	3663952346250
Inside diameter	60 mm
Outside diameter	125 mm
Thickness	24 mm
Packaging	1

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE