


# Tapered roller bearing NA580SW-572D-TIMKEN - NA580SW-572D-TIMKEN

<https://www.123bearing.com/bearing-housing/roller-bearing/tapered/na580sw-572d-timken>

**TAPERED ROLLER BEARINGS**  
DOUBLE ROW • TYPE TNASWE

**TYPE TNASWE**

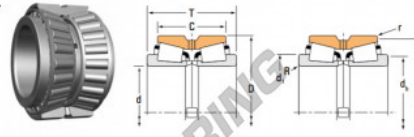

Bearing Dimensions				Load Ratings								
Bore d	O.D. D	Width T	Double Outer Ring Width C	Dynamic <sup>1)</sup>		Factors <sup>2)</sup>		Dynamic <sup>3)</sup>			Factors <sup>4)</sup> K	
				C <sub>10</sub>	C	Y <sub>1</sub>	Y <sub>2</sub>	C <sub>10</sub>	C <sub>90</sub>	C <sub>50</sub>		
mm	mm	mm	mm	N	N			N	N	N		
82.55	139.992	92.075	66.675	36000	30000	0.45	1.87	2.49	52000	37100	50400	1.45
3.2500	5.5115	3.6250	2.6250	80000	80000				12100	8350	21000	

Part Number		Bearing				Shaft		Housing		Bearing Weight
Inner	Outer	Outside Dia. 10d	Max Shaft Fillet Radius	Backing Shoulder Dia.	Max Housing Fillet Radius	Backing Shoulder Dia.	Max Housing Fillet Radius	Backing Shoulder Dia.		
		d <sub>1</sub> <sup>1)</sup>	r <sub>s</sub> <sup>2)</sup>	d <sub>s</sub>	r <sub>h</sub> <sup>3)</sup>	D <sub>s</sub>	r <sub>h</sub> <sup>3)</sup>	D <sub>s</sub>		
NA580SW	572D	108.882	2.5	98.0	0.8	139.0	0.8	139.0	4.87	
		4.3229	0.14	3.86	0.03	5.39	0.03	5.39	10.758	

## PRODUCT FEATURES

Brand	TIMKEN
N° Ean13	3663952374901
Inside diameter	82.55 mm
Outside diameter	139.992 mm
Thickness	92.075 mm
Weight	4930 g
Packaging	1
Standard	No standard

[contact@123bearing.com](mailto:contact@123bearing.com)

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE