


Needle roller bearing GBRI142620-UU-IKO - GBRI142620-UU-IKO

<https://www.123bearing.com/bearing-housing/needle-roller-bearing/needle/gbri142620-uu-iko>

IKO
MACHINED TYPE NEEDLE ROLLER BEARINGS
With Seal, With Inner Ring, Inch Series

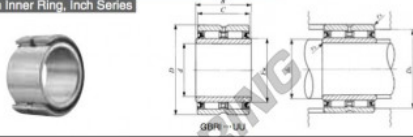

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)		
	With two seals	With one seal		d	D	C
22.225 ($\frac{7}{8}$)	GBRI 142620 UU		200	22.225 $\frac{7}{8}$	41.275 $1\frac{1}{2}$	31.750 $1\frac{1}{2}$

B	F _w	Standard mounting dimensions - mm			Basic dynamic load rating C N	Basic static load rating C ₀ N	Allowable rotational speed ⁽²⁾ rpm	Assembled inner ring	
		Min.	Max.	r _{as max} ⁽¹⁾					
32.000	28.575 $1\frac{1}{4}$	27	27.5	36.3	0.6	43 900	75 300	3 000	LRBZ 141820

Notes: (1) Minimum allowable value of chamfer dimension r.
(2) Allowable rotational speed applies to grease lubrication.
Remark: This outer ring has an oil groove and an oil hole.
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952383354
Inside diameter	22.225 mm
Outside diameter	41.275 mm
Thickness	31.75 mm
Packaging	1

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE