


Needle roller bearing GBR1325228-U-IKO - GBR1325228-U-IKO

<https://www.123bearing.com/bearing-housing/needle-roller-bearing/needle/gbr1325228-u-iko>

IKO
MACHINED TYPE NEEDLE ROLLER BEARINGS
With Seal, With Inner Ring, Inch Series

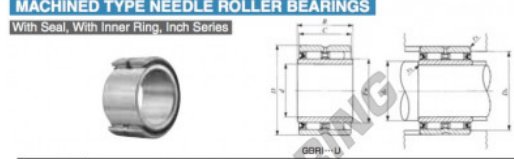

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)		
	With two seals	With one seal		d	D	C
50.800 (2)	GBR1 325228 U		950	50.800 (2)	82.550 (3/2)	44.450 (1/2)

B	F _w	Standard mounting dimensions mm			Basic dynamic load rating C N	Basic static load rating C ₀ N	Allowable rotational speed ⁽²⁾ rpm	Assembled inner ring
		d _{min}	d _{max}	D _s Max.				
44.700	63.500 (2/2)	58	61	75.7	93 300	179 000	1 300	LRBZ 324028

Note(1) Minimum allowable value of chamfer dimension r
 (2) Allowable rotational speed applies to grease lubrication.
 Remark: This roller ring has an oil groove and an oil hole.
 2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952383538
Inside diameter	50.8 mm
Outside diameter	82.55 mm
Thickness	44.45 mm
Packaging	1

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE