


Cam follower CF6-FBR-IKO - CF6-FBR-IKO

<https://www.123bearing.com/bearing-housing/deep-groove-bearing/cam-follower/cf6-fbr-iko>

IKO

CAM FOLLOWERS

Stainless Steel Made Cam Followers With Cage/With Hexagon Hole

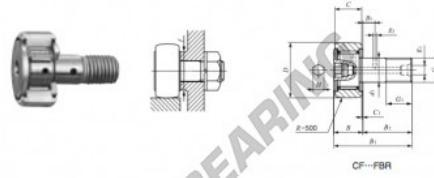

| Stud dia. mm | Identification number | | | | Mass (Ref.) g | D | C | d ₁ | G | G ₁ |
|-----------------|----------------------------|--------------------------------|---------------------------|--------------------------------|---------------------|----|----|----------------|-------|----------------|
| | Shield type | | Sealed type | | | | | | | |
| | With crowned outer ring | With cylindrical outer ring | With ribbed outer ring | With cylindrical outer ring | | | | | | |
| 6 | CF | 6 | FBR | | 18.5 | 16 | 11 | 6 | M 6×1 | B |

| Boundary dimensions mm | | | | | | | | Mounting dimension f Min. mm | Maximum tightening torque N·m | Basic dynamic load rating C N | Basic static load rating C ₀ N | Maximum allowable static load N |
|------------------------|----------------|----------------|----------------|----------------|----------------|----------------|---|--|--|--|--|--|
| B | B ₁ | B ₂ | B ₃ | C ₁ | g ₁ | g ₂ | H | | | | | |
| 12.2 max | 28.2 max | 16 | — | 0.6 | — | — | 3 | — | 11 | 2 930 | 2 920 | 1 950 |

PRODUCT FEATURES

| | |
|------------------|---------------|
| Brand | IKO |
| N° Ean13 | 3663952439969 |
| Inside diameter | 6 mm |
| Outside diameter | 16 mm |
| Thickness | 11 mm |
| Packaging | 1 |

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE