


## Cam follower CF10-1-VBR-IKO - CF10-1-VBR-IKO

<https://www.123bearing.com/bearing-housing/deep-groove-bearing/cam-follower/cf10-1-vbr-iko>



### CAM FOLLOWERS

Standard Type Cam Followers Full Complement Type/With Hexagon Hole

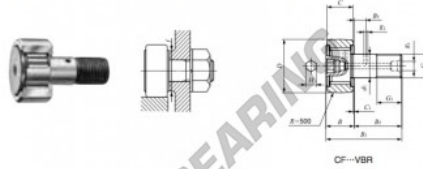

Stud dia. mm	Identification number								Mass (Ref.)				
	Shield type				Sealed type				g	D	C	d <sub>1</sub>	
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring					
10	CF 10-1 VBR								61	26	12	10	

Boundary dimensions mm										Mounting dimension	Maximum tightening torque	Basic dynamic load rating	Basic static load rating	Maximum allowable static load	
G	G <sub>1</sub>	B <sub>max</sub>	B <sub>1</sub> <sub>max</sub>	B <sub>2</sub>	B <sub>3</sub>	C <sub>1</sub>	g <sub>1</sub>	g <sub>2</sub>	H	f <sup>(*)</sup> <sub>max</sub>	f <sub>min</sub> mm	N-m	C	C <sub>0</sub>	N
M10×1.25	12	13.2	36.2	23	—	0.6	—	—	4	0.3	16	13.8	9 570	14 500	8 650

## PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952441900
Inside diameter	10 mm
Outside diameter	26 mm
Thickness	12 mm
Packaging	1

[contact@123bearing.com](mailto:contact@123bearing.com)

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE