


Cam follower CFES16-BR-IKO - CFES16-BR-IKO

<https://www.123bearing.com/bearing-housing/deep-groove-bearing/cam-follower/cfes16-br-iko>



CAM FOLLOWERS

Solid Eccentric Stud Type Cam Followers With Cage/With Hexagon Hole

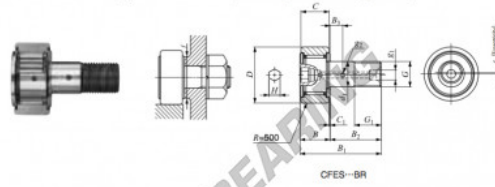

Stud dia. mm	Identification number										Mass (Ref.) g	D	C	d ₁	
	Shield type					Sealed type									
	With crowned outer ring		With cylindrical outer ring			With crowned outer ring		With cylindrical outer ring							
16	CFES 16 BR										170	35	18	16	
Boundary dimensions mm															
G	G ₁	B _{max}	B _{1max}	B ₂	C ₁	g ₁	g ₂	H	E	f Min. mm	Mounting torque N·m	Basic dynamic load rating C	Basic static load rating C ₀	Maximum allowable static load N	
M16×1.5	17	19.6	52.1	32.5	8	0.8	6	3	6	0.6	26	58.5	12 000	18 300	18 300

PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952443614
Inside diameter	16 mm
Inside diameter	0.63" inch
Outside diameter	35 mm
Outside diameter	1.378" inch
Thickness	18 mm
Thickness	0.709" inch
Packaging	1

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE