


Cam follower CFES6-UUR-IKO - CFES6-UUR-IKO

<https://www.123bearing.com/bearing-housing/deep-groove-bearing/cam-follower/cfes6-uur-iko>

IKO

CAM FOLLOWERS

Solid Eccentric Stud Type Cam Followers With Cage/With Screwdriver Slot

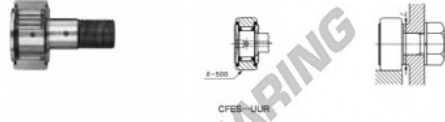

Stud dia. mm	Identification number						Mass (Ref.)			
	Shield type			Sealed type			g	D	C	d ₁
	With crowned outer ring	With cylindrical outer ring		With crowned outer ring	With cylindrical outer ring					
6			CFES 6	UUR			18.5	16	11	6

Boundary dimensions mm										Mounting dimension f Min. mm	Maximum tightening torque N·m	Basic dynamic load rating C N	Basic static load rating C ₀ N	Maximum allowable static load N
G	G ₁	B	B ₁	B ₂	B ₃	C ₁	B ₁	B ₂	B ₃					
M 6×1	8	12.2	28.2	16		0.6	*4	0.3	0.25	11	2.7	3 660	3 650	1 980

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060459060
Inside diameter	6 mm
Outside diameter	16 mm
Thickness	11 mm
Packaging	1

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE