


Cam follower CRH36-VBR-IKO - CRH36-VBR-IKO

<https://www.123bearing.com/bearing-housing/deep-groove-bearing/cam-follower/crh36-vbr-iko>

IKO

CAM FOLLOWERS

Inch Series Heavy Duty Cam Followers Full Complement Type/With Hexagon Hole

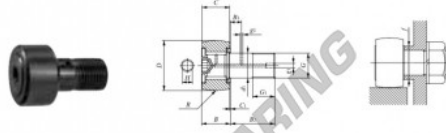

| Stud dia. mm (inch) | Identification number | | Mass (Ref.) g | CRH--VBR | | | | | | |
|---------------------------|-----------------------|-------------|---------------------|---------------|---------------|----------------|----------|----------------|-------------|--|
| | Shield type | Sealed type | | D | C | d ₁ | G UNF | G ₁ | B max | |
| 28.575 (1.125) | CRH 36 | VBR | 858 | 57.150 (2.25) | 31.750 (1.25) | 28.575 (1.125) | 1.75-12 | 25.400 (1) | 34.2 (1.35) | |

| Boundary dimensions mm(inch) | | | | | | | | Mounting dimension F mm (inch) | Maximum tightening torque N·m | Basic dynamic load rating C N | Basic static load rating C ₀ N |
|------------------------------|----------------|----------------|----------------|----------------|----------------|----------|---------------|--|--|--|--|
| B ₂ | B ₃ | C ₁ | S ₁ | S ₂ | H | R | F | | | | |
| 50.800 (2) | 12.700 (.5) | 1.988 (.78) | 4.762 (.1875) | 3.175 (.125) | 11.112 (.4375) | 600 (36) | 37.306 (1.47) | 356 | 45 700 | 80 600 | |

PRODUCT FEATURES

| | |
|------------------|---------------|
| Brand | IKO |
| N° Ean13 | 3663952463834 |
| Inside diameter | 28.575 mm |
| Outside diameter | 57.15 mm |
| Thickness | 31.75 mm |
| Weight | 858 g |
| Packaging | 1 |

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE