

# TAPR Rod end


## GIHL-K35-DO-DURBAL - GIHL-K35-DO-DURBAL

<https://www.123bearing.com/bearing-housing/rod-end/tapr/gihl-k35-do-durbal>

### GIHL-K35-DO



**Description:** Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE...ES pressed into rod end housing. Sliding combination steel / steel, with grease nipple.

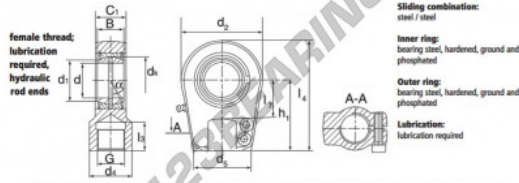

**Sliding combination:**  
steel / steel

**Inner ring:**  
bearing steel, hardened, ground and phosphated

**Outer ring:**  
bearing steel, hardened, ground and phosphated

**Lubrication:**  
lubrication required

order number	d	d <sub>1</sub>	G	d <sub>2</sub>	d <sub>3</sub>	B	C <sub>1</sub>	d <sub>4</sub>
right hand thread								
left hand thread								
<b>GIHL-K 35 DO</b>	35	39,7	M 28 x 1,5	40	66	25	30	78

type	l <sub>1</sub> min	l <sub>2</sub> min	h <sub>1</sub>	h <sub>2</sub>	l <sub>4</sub>	d <sub>5</sub>	α [°]	load rating C <sub>0</sub> [N]	weight [kg]
<b>GIHL-K / GIHL-K 35 DO</b>	29	38	70	112,0	47,0	6		153	1,20

## PRODUCT FEATURES

Brand	DURBAL
N° Ean13	3663952499109
Inside diameter	35 mm
Outside diameter	78 mm
Thickness	30 mm
Type	TAPR
Weight	1200 g
Thread	Left-hand thread
Lubrication	with
Packaging	1

[contact@123bearing.com](mailto:contact@123bearing.com)

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE