


# TAPR Rod end GIHL-K40-DO-DURBAL - GIHL-K40-DO-DURBAL

<https://www.123bearing.com/bearing-housing/rod-end/tapr/gihl-k40-do-durbal>

## GIHL-K40-DO



**Description:** Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE...ES pressed into rod end housing. Sliding combination steel / steel, with grease nipple.

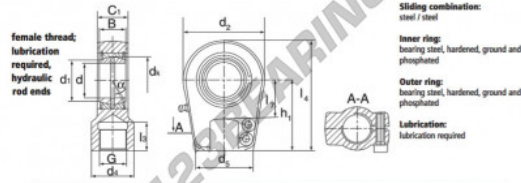

order number	d	d <sub>1</sub>	G	d <sub>2</sub>	d <sub>3</sub>	B	C	d <sub>3</sub>
right hand thread								
GIHL-K 40 DO	40	45,0	M 35 x 1,5	49	76	28	35	94

type	l <sub>1</sub> min	l <sub>2</sub> min	h	l <sub>4</sub>	d <sub>4</sub>	α [°]	load rating C <sub>0</sub> [N]	weight [kg]
GIHL-K / GIHL-K 40 DO	36	45	85	135,0	53,0	7	250	2,00

## PRODUCT FEATURES

Brand	DURBAL
N° Ean13	3663952499154
Inside diameter	40 mm
Outside diameter	94 mm
Thickness	35 mm
Type	TAPR
Weight	2000 g
Thread	Left-hand thread
Lubrication	with
Packaging	1

[contact@123bearing.com](mailto:contact@123bearing.com)

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE