

TAPR Rod end GIHN-KL-50LO-DURBAL - GIHN-KL-50LO-DURBAL


<https://www.123bearing.com/bearing-housing/rod-end/tapr/gihn-kl-50lo-durbal>

GIHN-KL-50LO



Description: Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE. LO pressed into rod end housing. Sliding combination steel / steel with grease nipple.

* without grease nipple

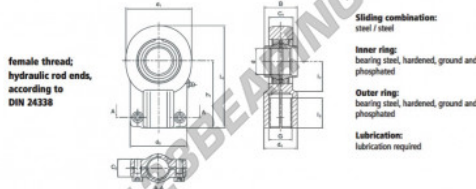

female thread;
hydraulic rod ends,
according to
DIN 24338

Sliding combination:

steel / steel

Inner ring:
bearing steel, hardened, ground and
phosphated

Outer ring:
bearing steel, hardened, ground and
phosphated

Lubrication:
lubrication required

| order number | d | d ₁ | measurement [mm] | G | d ₂ | B | C ₁ | C ₂ |
|----------------------|----|----------------|------------------|------|----------------|----|----------------|----------------|
| right hand thread | | | | | | | | |
| left hand thread | | | | | | | | |
| GIHN-KL 50 LO | 50 | 109 | M 42 x 2 | 58,0 | 96 | 50 | 41 | 32 |

| type | l ₁ min | measurement [mm] | l ₂ | l ₃ | load rating | weight |
|------------------------|--------------------|------------------|----------------|----------------|---------------------|--------|
| | | | | | C ₀ [kN] | [kg] |
| GIHN-K / GIHN-KL 50 LO | 57 | 120 | 179,5 | 50 | 310,0 | 4,40 |

PRODUCT FEATURES

| | |
|------------------|------------------|
| Brand | DURBAL |
| N° Ean13 | 3663952500287 |
| Inside diameter | 50 mm |
| Outside diameter | 109 mm |
| Thickness | 41 mm |
| Type | TAPR |
| Weight | 4400 g |
| Thread | Left-hand thread |
| Lubrication | with |
| Packaging | 1 |

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE