Housed bearing accessorie
7620-DL-NICE - 7620-DL-NICE

https://www.123bearing.com/bearing-housing/housed-bearing/accessories/7620-dl-nice

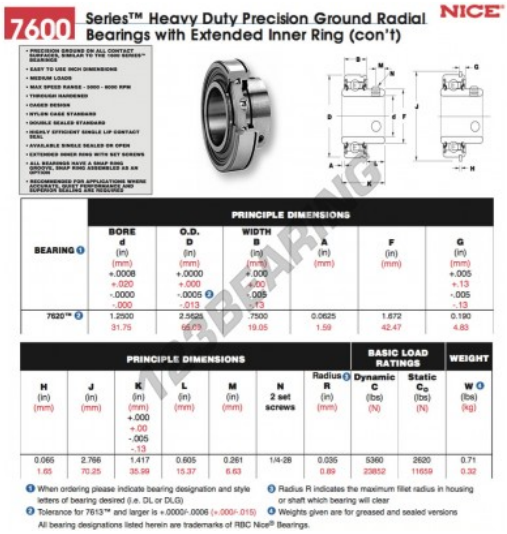

7600 Series™ Heavy Duty Precision Ground Radial Bearings with Extended Inner Ring (con't)

NICE

BEARING ①	PRINCIPLE DIMENSIONS					
	BORE d (in) (mm) +.0008 +.020 -.0000 -.000	O.D. D (in) (mm) +.0000 +.000 -.0005 ② -.013	WIDTH B (in) (mm) +.000 +.00 -.005 -.13	A (in) (mm)	F (in) (mm)	G (in) (mm) +.005 +.13 -.005 -.13
7620™ ②	1.2500 31.75	2.5625 65.03	.7500 19.05	0.0625 1.59	1.672 42.47	0.190 4.83

PRINCIPLE DIMENSIONS							BASIC LOAD RATINGS		WEIGHT
H (in) (mm)	J (in) (mm)	K (in) (mm) +.000 +.00 -.005 -.13	L (in) (mm)	M (in) (mm)	N 2 set screws	Radius ③ R (in) (mm)	Dynamic C (lbs) (N)	Static C_o (lbs) (N)	W ④ (lbs) (kg)
0.065 1.65	2.766 70.25	1.417 35.99	0.605 15.37	0.261 6.63	1/4-28	0.035 0.89	5360 23852	2620 11659	0.71 0.32

① When ordering please indicate bearing designation and style letters of bearing desired (i.e. DL or DLG)

② Tolerance for 7613™ and larger is +.0000/-.0006 (+.000/-.015)

All bearing designations listed herein are trademarks of RBC Nice® Bearings.

③ Radius R indicates the maximum fillet radius in housing or shaft which bearing will clear

④ Weights given are for greased and sealed versions

PRODUCT FEATURES

Brand	NICE
N° Ean13	3616060473509
Inside diameter	31.75 mm
Outside diameter	42.47 mm
Thickness	19.05 mm
Weight	320 g
Packaging	1

contact@123bearing.com
(646) 712 9672
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE