


Tapered roller bearing 46224A-JTEKT - 46224A-JTEKT

<https://www.123bearing.com/bearing-housing/roller-bearing/tapered/46224a-jtekt>

Double-row tapered roller bearings Koyo
TDO type

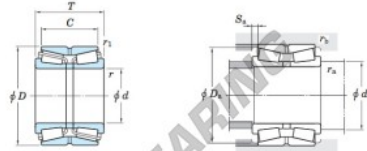

Boundary dimensions (mm)						Basic load ratings (kN)		Limiting speeds (min ⁻¹)	
d	D	T	C	r ₁ min.	r ₁ max.	C _r	C _{0r}	Grease lub.	Oil lub.
120	180	58	46	2.5	0.6	247	460	1 500	2 100

Bearing No.	Mounting dimensions (mm)					Constant e	Axial load factors			Refer.) Mass (kg)
	d ₄ min.	D ₄ min.	S _d min.	r _a max.	r ₂ max.		Y ₂	Y ₃	Y ₀	
46224A	132	169	6	2	0.6	0.35	1.95	2.90	1.91	4.66

PRODUCT FEATURES

Brand	JTEKT
N° Ean13	4549250133077
Inside diameter	120 mm
Inside diameter	4.724" inch
Outside diameter	180 mm
Outside diameter	7.087" inch
Thickness	46 mm
Thickness	1.811" inch
2nd Thickness	58 mm
2nd Thickness	2.283" inch
Weight	4660 g
Packaging	1

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE