


## Tapered roller bearing 45332-JTEKT - 45332-JTEKT

<https://www.123bearing.com/bearing-housing/roller-bearing/tapered/45332-jtekt>

Double-row tapered roller bearings **Koyo**  
TDI type

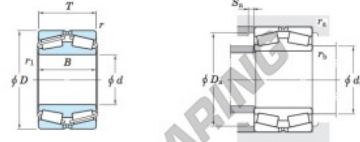

Boundary dimensions (mm)						Basic load ratings (kN)		Limiting speeds (min <sup>-1</sup> )	
d	D	B	T	r	r <sub>1</sub>	C <sub>r</sub>	C <sub>0r</sub>	Grease lub.	Oil lub.
160	270	86	86	2.5	3	678	1100	1000	1400

Bearing No.	Mounting dimensions (mm)						Constant e	Axial load factors			(Refer.) Mass (kg)
	d <sub>a</sub> max.	D <sub>a</sub> max.	D <sub>a</sub> min.	S <sub>a</sub> min.	r <sub>a</sub> max.	r <sub>b</sub> max.		Y <sub>2</sub>	Y <sub>3</sub>	Y <sub>0</sub>	
45332	193	258	237	4	2	2.5	0.35	1.95	2.90	1.91	19.8

### PRODUCT FEATURES

Brand	JTEKT
N° Ean13	3663952481845
Inside diameter	160 mm
Outside diameter	270 mm
Thickness	86 mm
Weight	19800 g
Packaging	1

[contact@123bearing.com](mailto:contact@123bearing.com)

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE