


Tapered roller bearing 45338-JTEKT - 45338-JTEKT

<https://www.123bearing.com/bearing-housing/roller-bearing/tapered/45338-jtekt>

Double-row tapered roller bearings
TDI type Koyo

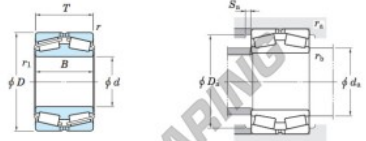

Boundary dimensions (mm)					Basic load ratings (kN)		Limiting speeds (min ⁻¹)		
<i>d</i>	<i>D</i>	<i>B</i>	<i>T</i>	<i>r</i> max.	<i>r</i> min.	<i>C_r</i>	<i>C_{0r}</i>	Grease lub.	Oil lub.
190	320	104	104	3	4	981	1 590	840	1 100

Bearing No.	Mounting dimensions (mm)						Con- stant <i>e</i>	Axial load factors			(Refer.) Mass (kg)
	<i>d_a</i> max.	<i>D_a</i> max.	<i>D_a</i> min.	<i>S_a</i> min.	<i>r_a</i> max.	<i>r_b</i> max.		<i>Y₂</i>	<i>Y₃</i>	<i>Y₀</i>	
45338	224	306	280	5	2.5	3	0.35	1.96	2.90	1.91	34.0

PRODUCT FEATURES

Brand	JTEKT
N° Ean13	3663952481906
Inside diameter	190 mm
Inside diameter	7.48" inch
Outside diameter	320 mm
Outside diameter	12.598" inch
Thickness	104 mm
Thickness	4.094" inch
Weight	34000 g
Packaging	1

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE