


## Tapered roller bearing 45380-JTEKT - 45380-JTEKT

<https://www.123bearing.com/bearing-housing/roller-bearing/tapered/45380-jtekt>

Double-row tapered roller bearings — **Koyo**  
TDI type

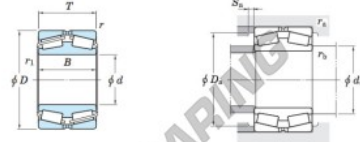

Boundary dimensions (mm)					Basic load ratings (kN)		Limiting speeds (min <sup>-1</sup> )	
d	D	B	T	r	C <sub>r</sub>	C <sub>0r</sub>	Grease lub.	Oil lub.
400	650	200	200	6	3 850	7 810	320	420

Bearing No.	Mounting dimensions (mm)					Constant e	Axial load factors			(Refer.) Mass (kg)
	d <sub>1</sub> max.	D <sub>1</sub> max.	S <sub>1</sub> min.	r <sub>1</sub> max.	r <sub>2</sub> max.		Y <sub>2</sub>	Y <sub>3</sub>	Y <sub>0</sub>	
45380	458	622	580	11	5	0.39	1.74	2.59	1.70	265

### PRODUCT FEATURES

Brand	JTEKT
N° Ean13	3663952482132
Inside diameter	400 mm
Outside diameter	650 mm
Thickness	200 mm
Weight	265000 g
Packaging	1

[contact@123bearing.com](mailto:contact@123bearing.com)

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE